



# RF1335N2POS

## POS

Standardized Modular Design  
Easy Serviceability  
Robust Yet Slim  
Cost Competitive



10.1" 2<sup>nd</sup> Display



Customer Display



Blade Connectivity



3 - Track MSR




Fingerprint



iButton



# RF1335N2POS POS

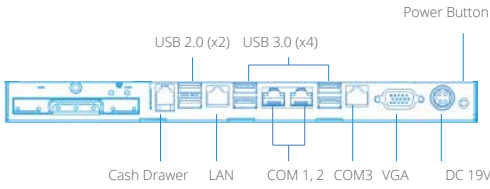

**FANLESS DESIGN**  
Reduce Noise And Prevent



**15" DISPLAY**  
True Flat PCAP Touch  
Resolution 1024 x 768  
Dimension 360 x 210 x 316 mm (14.2" x 8.3" x 12.4")  
Weight 5.4 kg (11.9 lbs)



**ROBUST YET SLIM**

<b>System</b>	Motherboard	D86U
	Processor	Intel Skylake U CPU Celeron 3955U 2GHz, LLC 2M (15W, EIA) i3 6100U 2.3GHz, LLC 3M (15W, EIA)
	Chipset	CPU Integrated
	System Memory	1x DDR3L SO DIMM up to 8GB
	Storage Device	1x 2.5" SATA HDD or SSD
	Graphic Engine	Intel HDGraphic DX12 and OCL4.2
	<b>LCD Touch Panel</b>	LCD Size 15" TFT LCD Brightness 350 nits Resolution 1024 x 768 Touch Screen TrueFlat PCAP Touch
<b>Expansion</b>	Mini PCIE Slot	
	USB	4x USB3.0, 2x USB2.0
	Serial port	3x RJ45 (powered RS232) (default0V, COM1,2 0V/5V; COM3 0V12V)
<b>External I/O Ports</b>	LAN	1x RJ45
	Cash Drawer	1x RJ11 (12V/24V)
	VGA	1x DB15
	DC Jack	1x 4 pin w/ lock
<b>Optional I/O</b>	Power USB	
<b>Audio</b>	Internal Speaker	
<b>Indicator</b>	LEDIndicator	
<b>Power</b>	Power Supply	90W / 19V(120W / 19V with PUSB 12V& 24V
<b>Communication</b>	WLAN+BT	
<b>Peripheral (Option)</b>	MSR	
	iButton	Fingerprint10.1" 2nddisplay
	Fingerprint	
	2nd Display	
	Customer Display	
<b>Certificate</b>	EMC & Safety	
<b>Environment</b>	Operating Temperature	
	Storage Temperature	
	Humidity	
<b>Dimensions (WxDxH)</b>		
<b>Weight</b>		
<b>Mounting</b>		
<b>OS Supported</b>	Windows 7 Pro (64bit), POSReady7 (64bit), Windows 8.1 (64bit),Windows Embedded 8.1 Industry (64bit), Windows 10 (64bit),Windows 10 IoTEnterprise (64bit), Linux	

\*Product specifications subject to change without prior notice